


# TSC

The Smarter Choice.



## TTP-286MT SERIES – Industrial Thermal Transfer Bar Code Printer PRECISION AND HIGH PERFORMANCE IN A WIDE-FORMAT PRINTER

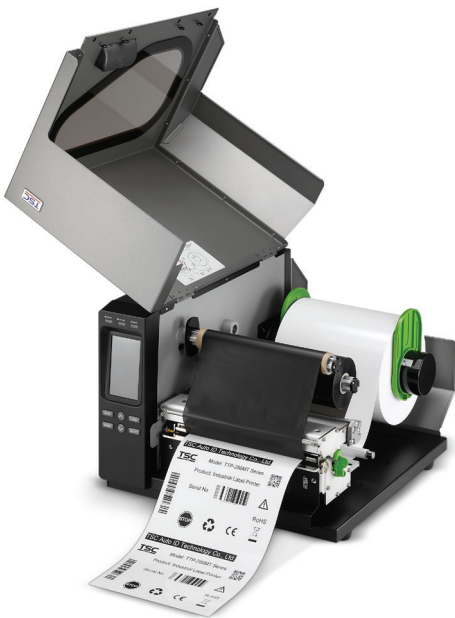

### KEY FEATURES

- 4.3" touch LCD display with 6-button menus
- Ethernet, USB 2.0, serial, parallel and USB Host\*1 connectivity are standard.
- Die-cast chassis, sheet metal structure with clear media view window
- Can manage label widths up to 241.3 mm (9.5") with a maximum print width up to 219.5 mm (8.64") wide at 300 dpi high resolution
- 600 meter ribbon supply
- 512 MB Flash and 256 MB SDRAM memory
- SD Flash memory expansion up to 32 GB
- Up to 6" per sec. print speed for 203 dpi, and 4" per sec. print speed for 300 dpi
- Powerful basic programming tools
- Options include: GPIO connectivity, Bluetooth module, cutter module

### APPLICATIONS

- Compliance Labeling For Shipping & Receiving
- Brand Marketing Featuring Graphics, Logos & Texts
- Pallet Labeling
- Inventory Control Labeling
- Warning Labels
- Drum Labeling
- Custom Signage
- Multiple-up Labels (two or three labels across)

**EZS**<sup>®</sup>  
Etiketten Thermotransferfolien Hard- und Software  
**IDENTTECHNIK**  
*It's always a good ID*

## TTP-286MT SERIES – Industrial Thermal Transfer Bar Code Printer

| PRINTER MODEL             | TTP-286MT  | TTP-384MT                   |
|---------------------------|--|-----------------------------|
| Resolution                | 8 dots/mm (203 DPI)  | 12 dots/mm (300 DPI)        |
| Printing method           | Thermal Transfer & Direct Thermal  |                             |
| Max. print speed          | 152 mm (6")/second   | 102 mm (4")/second          |
| Max. print width          | 216 mm (8.5")  | 219.5 mm (8.64")            |
| Max. print length         | 11,430 mm (450")   | 5,080 mm (200")             |
| Enclosure                 | Die-cast chassis/Sheet metal structure with clear media view window  |                             |
| Physical dimension        | 440 mm (W) x 336 mm (H) x 514 mm (D)<br>17.32" (W) x 13.23" (H) x 20.24" (D)   |                             |
| Weight                    | 23.7 kg (N.W)  |                             |
| Label roll capacity       | 208.3 mm (8.2") OD   |                             |
| Ribbon                    | 600 m long, Max. 90 mm OD, 1" core (ink coated outside)  |                             |
| Ribbon width              | 110 mm ~ 254 mm (4.3" ~ 10")   |                             |
| Processor                 | 32-bit RISC CPU  |                             |
| Memory                    | <ul style="list-style-type: none"> <li>• 512 MB Flash memory</li> <li>• 256 MB SDRAM</li> <li>• SD Flash memory card reader for Flash memory expansion, up to 32 GB</li> </ul>   |                             |
| Interface                 | <ul style="list-style-type: none"> <li>• RS-232</li> <li>• Centronics</li> <li>• USB 2.0</li> <li>• Internal Ethernet, 10/100 Mbps</li> <li>• USB host, for scanner or PC keyboard</li> <li>• GPIO (factory option)</li> <li>• Bluetooth (user option)</li> </ul>  |                             |
| Power                     | Internal universal switching power supply<br><ul style="list-style-type: none"> <li>• Input: AC 100~240V, 3.0A, 50~60Hz</li> <li>• Output: DC 24V, 8.33A, 200W</li> </ul>  |                             |
| LCD                       | 16 bits Color, 480 x 272 pixels, with back lights, Resistive Touch Screen  |                             |
| Operation switch, button  | 1 power switch, 6 operation buttons (Menu, Pause, Feed, Up, Down, Select)  |                             |
| Sensors                   | <ul style="list-style-type: none"> <li>• Gap transmissive sensor (position adjustable)</li> <li>• Black mark reflective sensor (position adjustable)</li> <li>• Ribbon end sensor</li> <li>• Ribbon Encoder sensor</li> <li>• Head open sensor</li> </ul>  |                             |
| Real time clock           | Standard   |                             |
| Internal fonts            | <ul style="list-style-type: none"> <li>• 8 alpha-numeric bitmap fonts</li> <li>• Monotype Imaging® true type font engine with one CG Triumvirate Bold Condensed scalable font</li> </ul>   |                             |
| Bar code                  | <ul style="list-style-type: none"> <li>• 1D bar code<br/>Code 39, Code 93, Code 128UCC, Code 128 subsets A.B.C, Codabar, Interleave 2 of 5, EAN-8, EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on, MSI, PLESSEY, POSTNET, RSS-Stacked, GS1 DataBar, Code 11</li> <li>• 2D bar code<br/>PDF-417, Maxicode, DataMatrix, QR code, Aztec</li> </ul> |                             |
| Font and barcode rotation | 0, 90, 180, 270 degree   |                             |
| Printer language          | TSPL-EZ™ (Compatible to EPL, ZPL, ZPL II)  |                             |
| Media type                | Continuous, die-cut, fan-fold, tag, notched, black mark, perforated (outside wound)  |                             |
| Media width               | 101.6 ~ 241.3 mm (4" ~ 9.5")   |                             |
| Media thickness           | 0.06 ~ 0.254 mm (2.36 ~ 10 mil)  |                             |
| Media core diameter       | 76.2 mm (3")   |                             |
| Label length              | 25.4 ~ 11,430 mm (1" ~ 450")   | 25.4 ~ 5,080 mm (1" ~ 200") |
| Environment condition     | Operation: 5 ~ 40°C, 20 ~ 85% non-condensing<br>Storage: -40 ~ 60°C, 10 ~ 90% non-condensing   |                             |
| Safety regulation         | FCC Class A, CE Class A, UL, CUL, TÜV/Safety   |                             |
| Environmental concern     | Comply with RoHS, WEEE   |                             |
| Accessories               | <ul style="list-style-type: none"> <li>• Windows labeling software CD disk</li> <li>• Quick start guide</li> <li>• USB cable</li> <li>• Power cord</li> <li>• Ribbon paper core</li> </ul>   |                             |
| Limited warranty          | <ul style="list-style-type: none"> <li>• Printer: 2 years</li> <li>• Print head: 25 km (1 million inches) or 12 months which comes first</li> <li>• Platen: 50 km (2 million inches) or 12 months which comes first</li> </ul>   |                             |
| Factory options           | <ul style="list-style-type: none"> <li>• GPIO interface</li> </ul>   |                             |
| Dealer options            | N/A  |                             |
| User options              | <ul style="list-style-type: none"> <li>• Guillotine cutter (full cut)</li> <li>• Heavy duty cutter (full cut)</li> <li>• Bluetooth module (serial interface)</li> <li>• KP-200 Plus keyboard display unit</li> <li>• KU-007 Plus programmable smart keyboard</li> </ul>  |                             |



**EZS Identtechnik GmbH**  
 Welslerstrasse 4  
 D-87463 Dietmannsried

Tel.: +49 (0)8374 / 234 44  
 Fax: +49 (0)8374 / 234 45  
 eMail: info@e-z-s.de  
 Web: www.e-z-s.de